



**Quadraqua Electric, height 1828 mm, lenght 300 mm. Flame Red finish (cod. 7D).**

**Technical features:**

- electric radiating panel
- electrical power development: Quadraqua S 330 Watt, Quadraqua L 500 Watt
- wireless digital electronic control featuring weekly program
- class II insulation, IP 44
- long electricity cable: 1.200 mm (lower right side cable outlet), schuko plug

**Standard supply:**

- wall bracket kit
- heater heating system
- wireless receiver integrated on the plate with 2 leds to signal the function mode
- programmable wireless digital transmitter

**Wireless Remote Control**

Quadraqua Electric is equipped with a wireless controller that allows remote management of every electric radiator function. Because the controller is wireless, it has the advantage of being quick and easy to install and does not require any modifications within the home.

**Technical specifications**

Wireless communication via radio signals transmitted to the receiver connected to the system.

- Approx. 30-50 metre range in residential environments (868 MHz).
- Radiofrequency communication pursuant to European standards.
- Optional ITCS (Intelligent Temperature Control System)
- Open window detection function.






P. 158

eco  
design

# Quadraqua

electric

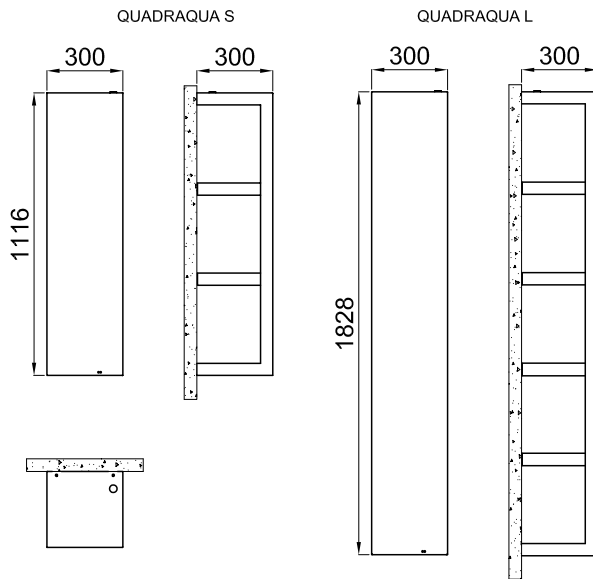

CE

Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt	
Quadraqua S Electric	<b>QDRS030Z XX IR NNN</b>	300	1116	300	15,5	<b>330</b>	
Quadraqua L Electric	<b>QDRL030Z XX IR NNN</b>	300	1828	300	24,9	<b>500</b>	

## Key Codes:

Width ———→ Packing code  
**QDR S 030 Z XX IR NNN**  
 ↑                      ↑  
 Height              Code color option

Finishes available	Surcharge
Standard White	-
Classic finishes	<b>+15%</b>
Special finishes	<b>+25%</b>
Other RAL colors	<b>+40% following feasibility study</b>
<b>Finishing codes see page 358.</b>	