



Sax Electric with led, height 1800 mm, length 395 mm. Standard White finish (cod. 01).

Technical features:

- manifolds with a 30 mm diameter circular section
- tubes made of sheet steel with a 20x25 mm rectangular section
- complete with thermal liquid
- electric heater, Class 2 (double insulation), provided with wireless electronic control
- In addition to setting the desired temperature and keeping it under control, the wireless control performs the following functions: comfort function, reduced nighttime use, anti-freeze, and programmed stopping
- single phase power supply 220 - 230 V, 50 Hz, Class II, IP 44
- long electricity cable: 1.200 mm (lower right side cable outlet), schuko plug

Standard supply:

- fixing brackets complete with screws and anchors
- Wireless remote control




Wireless Remote Control

Sax Electric is equipped with a wireless controller that allows remote management of every electric radiator function. Because the controller is wireless, it has the advantage of being quick and easy to install and does not require any modifications within the home.

Technical specifications

Wireless communication via radio signals transmitted to the receiver connected to the system.

- Approx. 30-50 metre range in residential environments (868 MHz).
- Radiofrequency communication pursuant to European standards.
- Optional ITCS (Intelligent Temperature Control System)
- Open window detection function.

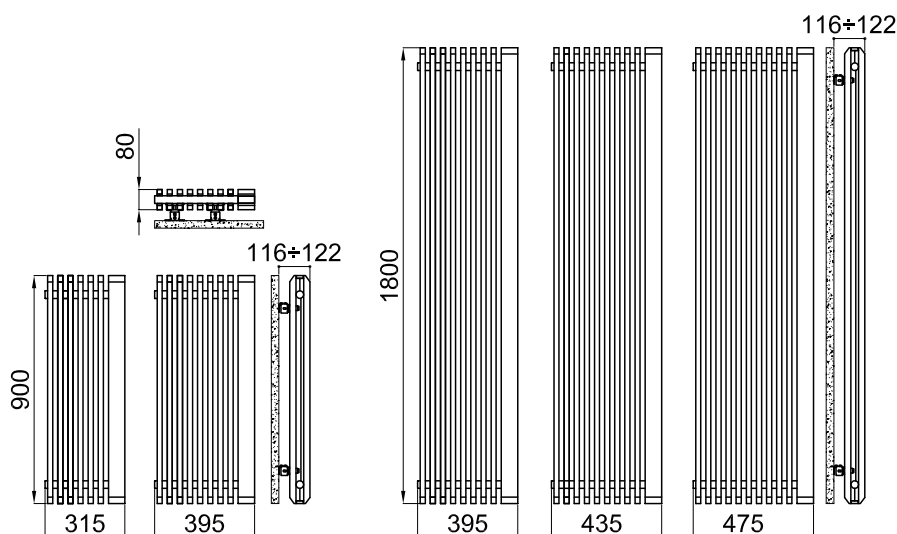

Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
SaX electric 500 Watt	S2ES031Z 01 IR NNN	80	900	315	17,6	500
SaX electric 750 Watt	S2ES039Z 01 IR NNN	80	900	395	21,8	750
SaX electric 1000 Watt	S2EE039Z 01 IR NNN	80	1800	395	38,5	1000
SaX electric 1500 Watt	S2EE043Z 01 IR NNN	80	1800	435	42,7	1500
SaX electric 1800 Watt	S2EE047Z 01 IR NNN	80	1800	475	46,8	1800
SaX electric with led 500 Watt	S2ES031Z 01 IR NLN - LED-AA	80	900	315	17,6	500
SaX electric with led 750 Watt	S2ES039Z 01 IR NLN - LED-AA	80	900	395	21,8	750
SaX electric with led 1000 Watt	S2EE039Z 01 IR NLN - LED-AA	80	1800	395	38,5	1000
SaX electric with led 1500 Watt	S2EE043Z 01 IR NLN - LED-AA	80	1800	435	42,7	1500
SaX electric with led 1800 Watt	S2EE047Z 01 IR NLN - LED-AA	80	1800	475	46,8	1800

Sax electric is completed with a metal carter of the same color as the radiator which contains inside the electric resistance, and outside a transparent methacrylate. Possibility to pre-install the LED indicating in the order the KITLED code.
Important: the metal carter must always be on the right side or in the bottom of the radiator.

Key Codes:

Width → Packing code
S2E S 031 Z 01 IR NNN
 Height Standard White colour code

Width → Packing code
S2E S 031 Z 01 IR NLN LED - AA
 Height Standard White colour code Configuration option for product with LED

Finishes available	Surcharge
Standard White	-
Classic finishes	+15%
Special finishes	+25%
Other RAL colors	+40% following feasibility study

Finishing codes see page 358.

Indication of possible installations

