



**Sequenze Electric, height 1735 mm, lenght 500 mm. Sunstone finish (cod. 2D).**

#### Technical features:

- electric radiating panel
- electrical power development: Sequenze S 260 Watt, Sequenze L 520 Watt
- wireless digital electronic control featuring weekly program
- 433 MHz function frequency
- class II insulation, IP 44
- long electricity cable: 1.200 mm (lower left side cable outlet), schuko plug

#### Standard supply:

- wall bracket kit
- heater heating system
- wireless receiver integrated on the plate with 2 leds to signal the function mode
- programmable wireless digital transmitter

#### Wireless Remote Control

Sequenze Electric is equipped with a wireless controller that allows remote management of every electric radiator function. Because the controller is wireless, it has the advantage of being quick and easy to install and does not require any modifications within the home.

#### Technical specifications

Wireless communication via radio signals transmitted to the receiver connected to the system.

- Approx. 30-50 metre range in residential environments (868 MHz).
- Radiofrequency communication pursuant to European standards.
- Optional ITCS (Intelligent Temperature Control System)
- Open window detection function.






P. 156

eco  
design


# Sequenze

electric

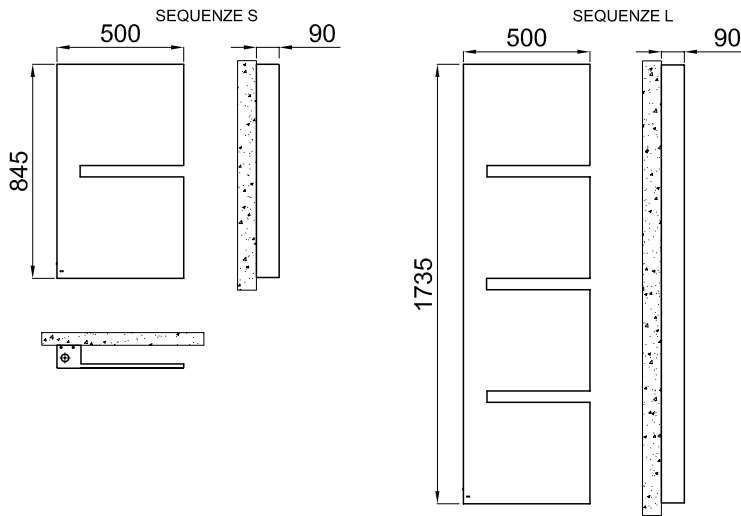

Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt	
Sequenze S Electric	<b>SQZS050Z XX IR NNN</b>	90	845	500	19,7	<b>260</b>	
Sequenze L Electric	<b>SQZE050Z XX IR NNN</b>	90	1735	500	38,9	<b>520</b>	

## Key Codes:



Finishes available	Surcharge
Standard White	-
Classic finishes	<b>+15%</b>
Special finishes	<b>+25%</b>
Other RAL colors	<b>+40% following feasibility study</b>
<b>Finishing codes see page 358.</b>	