



Xilo Electric, height 1744 mm, width 606 mm. Standard White finish (cod. 01).

Technical features:

- electric towel warmer radiator made of steel
- horizontal elements with rectangular tubes 50x10 mm manifolds
- side manifolds with a 30 mm round section
- complete with thermal fluid
- protection index: IP44
- the remote control can be positioned both on the radiator on the wall
- long electricity cable: 1.200 mm, schuko plug

Standard Supply:

- 4 adjustable wall fixing brackets in the same color of the radiator
- Wireless remote control

Wireless Remote Control

Xilo Electric is equipped with a wireless controller that allows remote management of every electric radiator function. Because the controller is wireless, it has the advantage of being quick and easy to install and does not require any modifications within the home.

Technical specifications

Wireless communication via radio signals transmitted to the receiver connected to the system.


- Approx. 30-50 metre range in residential environments (868 MHz).
- Radiofrequency communication pursuant to European standards.
- Optional ITCS (Intelligent Temperature Control System)
- Open window detection function.





Xilo

electric

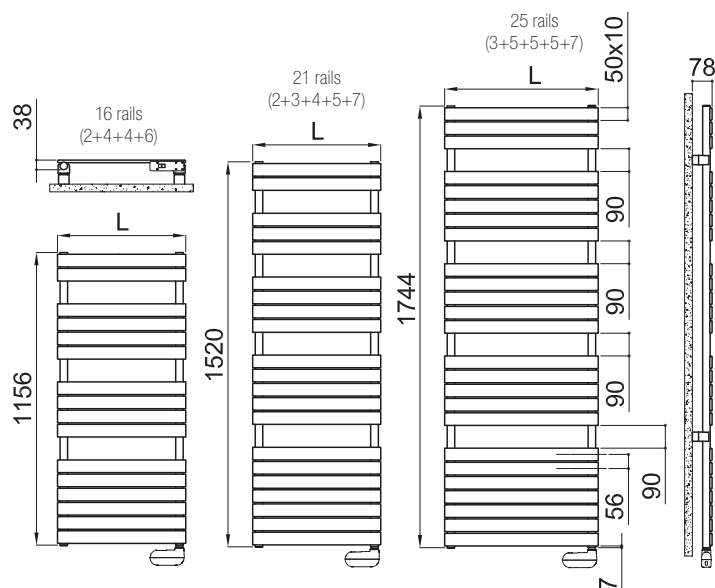

Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
1156 16 rails 3 espaces	XOM050 D 01 IR 01 NNN	38	1156	506	14,8	600
1520 21 rails 4 espaces	XOL050 D 01 IR 01 NNN	38	1520	506	19,2	800
	XOL060 D 01 IR 01 NNN	38	1520	606	22,1	1000
1744 25 rails 4 espaces	XOG060 D 01 IR 01 NNN	38	1744	606	26,0	1200

The radiator is not reversible.

The radiator will be supplied with the resistance always mounted on the right side.

Key Codes:

Standard White colour code - for different colour codes see the colors page

Width →

Height →

Packing code →

XO M 050 D 01 IR 01 NNN

Radiators' Colour	Electric heater's Colour
White	White, White wire (1,20 mt)

Finishes available	Surcharge
Standard White	-
Classic finishes	+15%
Special finishes	+25%
Other RAL colors	+40% following feasibility study
Finishing codes see page 358.	