



**ARES CHROME-PLATED**

height 1462 mm, length 530 mm. Chrome-plated finish (cod. 50).



**Technical features:**

- steel towel warmer radiator
- horizontal elements featuring round tubes with a 23 mm diameter
- side manifolds with a 40x30 mm semioval section
- manifold threading and central connections (50 mm) 1/2" Gas right
- maximum working pressure 8 bar
- maximum working temperature 95°C


**Prices include:**

- 3 chrome-plated infratube for wall fixing
- 1/2" chrome-plated air vent

Finishes available	Surcharge
Chrome-plated	-

❗ For the possibility of requesting custom models see page 590

**Connections**

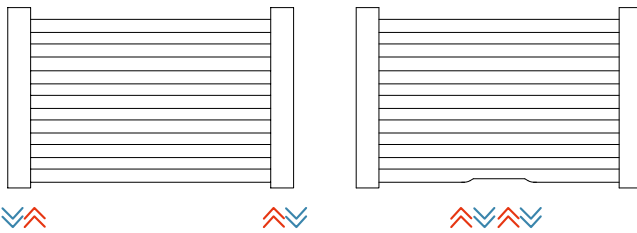



On the sides

50 mm

For other types of connections see pag. 422

**Connection dimensions with IRSAP valves**

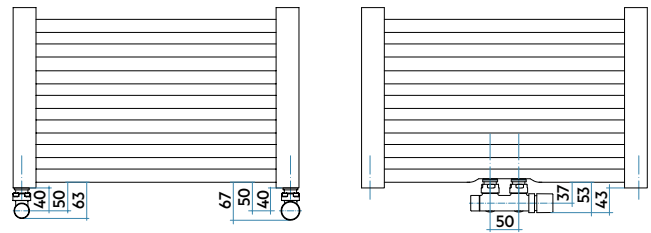


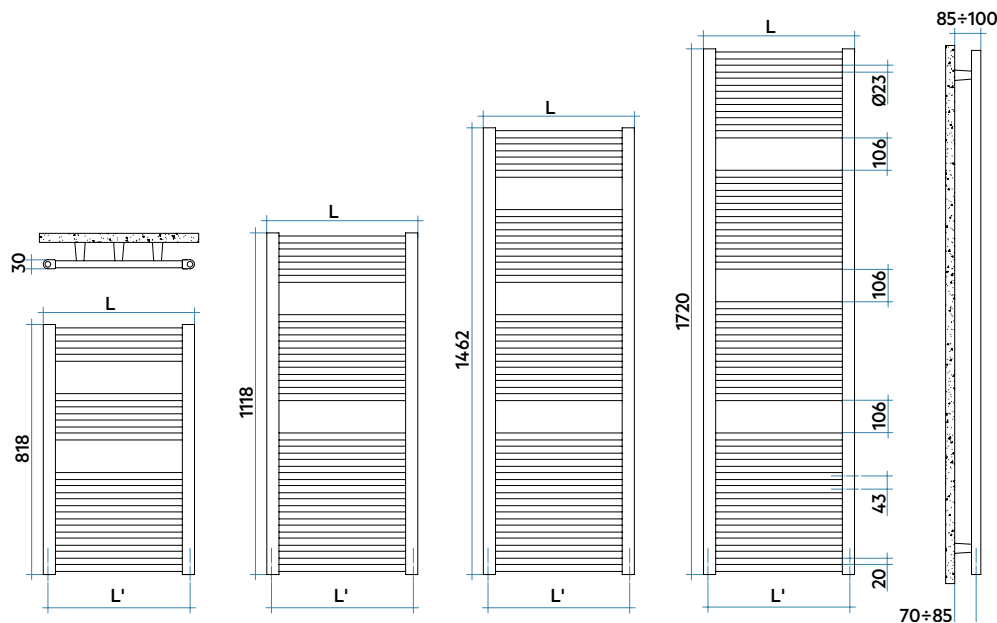


Model	Code	Depth	Height	Width	Conn. centre	Weight	Cap.	Thermal Power				Exp.	Mix. Funct.	
								Δt=50°C	Δt=40°C	Δt=30°C	Δt=20°C			
818 15 rails 2 espaces	EIS038 B 50 IR 01 NNN	30	818	380	350	4,2	3,2	652	<b>191</b>	144	<b>101</b>	61	1,254	0
	EIS043 B 50 IR 01 NNN	30	818	430	400	4,6	3,4	720	<b>211</b>	159	<b>110</b>	66	1,271	0
	EIS048 B 50 IR 01 NNN	30	818	480	450	4,9	3,7	788	<b>231</b>	174	<b>121</b>	72	1,267	0
	EIS053 B 50 IR 01 NNN	30	818	530	500	5,3	4,0	855	<b>251</b>	189	<b>131</b>	79	1,263	0
	EIS058 B 50 IR 01 NNN	30	818	580	550	5,7	4,2	924	<b>271</b>	204	<b>142</b>	85	1,260	300
	EIS073 B 50 IR 01 NNN	30	818	730	700	8,8	4,8	1128	<b>331</b>	250	<b>175</b>	105	1,249	300
1118 22 rails 2 espaces	EIM038 B 50 IR 01 NNN	30	1118	380	350	5,9	4,5	947	<b>278</b>	210	<b>147</b>	88	1,250	300
	EIM043 B 50 IR 01 NNN	30	1118	430	400	6,4	4,9	1035	<b>303</b>	229	<b>159</b>	96	1,260	300
	EIM048 B 50 IR 01 NNN	30	1118	480	450	7,0	5,2	1140	<b>334</b>	252	<b>176</b>	106	1,257	300
	EIM053 B 50 IR 01 NNN	30	1118	530	500	7,5	5,6	1245	<b>365</b>	276	<b>192</b>	115	1,255	400
	EIM058 B 50 IR 01 NNN	30	1118	580	550	8,1	6,0	1350	<b>396</b>	299	<b>209</b>	125	1,253	400
	EIM073 B 50 IR 01 NNN	30	1118	730	700	12,6	6,8	1664	<b>488</b>	369	<b>258</b>	156	1,247	400
1462 28 rails 3 espaces	EILO38 B 50 IR 01 NNN	30	1462	380	350	7,6	5,8	1216	<b>356</b>	270	<b>188</b>	113	1,251	400
	EILO43 B 50 IR 01 NNN	30	1462	430	400	8,3	6,3	1318	<b>386</b>	293	<b>205</b>	124	1,244	400
	EILO48 B 50 IR 01 NNN	30	1462	480	450	8,9	6,8	1454	<b>426</b>	323	<b>226</b>	136	1,246	400
	EILO53 B 50 IR 01 NNN	30	1462	530	500	9,6	7,2	1590	<b>466</b>	353	<b>246</b>	149	1,247	400
	EILO58 B 50 IR 01 NNN	30	1462	580	550	10,3	7,7	1726	<b>506</b>	383	<b>267</b>	161	1,249	400
	EILO73 B 50 IR 01 NNN	30	1462	730	700	16,1	8,7	2133	<b>625</b>	473	<b>330</b>	198	1,253	700
1720 34 rails 3 espaces	EIGO38 B 50 IR 01 NNN	30	1720	380	350	9,1	6,9	1478	<b>433</b>	328	<b>229</b>	138	1,248	400
	EIGO43 B 50 IR 01 NNN	30	1720	430	400	9,9	7,5	1603	<b>470</b>	355	<b>248</b>	149	1,251	400
	EIGO48 B 50 IR 01 NNN	30	1720	480	450	10,7	8,1	1770	<b>519</b>	392	<b>274</b>	165	1,250	400
	EIGO53 B 50 IR 01 NNN	30	1720	530	500	11,6	8,7	1937	<b>568</b>	430	<b>300</b>	181	1,250	400
	EIGO58 B 50 IR 01 NNN	30	1720	580	550	12,4	9,3	2104	<b>617</b>	467	<b>326</b>	196	1,249	700
	EIGO73 B 50 IR 01 NNN	30	1720	730	700	19,4	10,5	2606	<b>764</b>	578	<b>404</b>	244	1,247	700

(\* ) Thanks to the high performance of Irsap ARES CHROME-PLATED radiators, the ideal Δt for low temperature projects is Δt at 30°C.  
For Δt different from 50°C use the formula:  $Q = Q_n (\Delta t / 50)^n$


### Key Codes

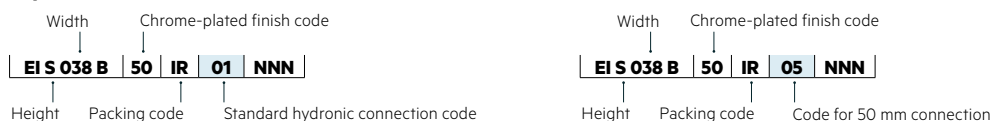


### Decorative & Technical Accessories



Kit Valves and Lockshield valve  
Pag. 564



Pipe cover kit  
Pag. 568



Electronic Control  
Pag. 584