





ARES CHROME-PLATED ELECTRIC

height 1462 mm, lenght 580 mm. Chrome-plated finish (cod. 50).

Technical features:

- electric steel towel warmer radiator
- horizontal elements with round tubes 23 mm diameter
- side manifolds with a 40x30 mm semioval section
- complete with thermal liquid
- 1.200 mm long power cable, SCHUKO plug

Prices include:

- 3 chrome-plated infratube for wall fixing

❶ For the possibility of requesting custom models see page 590

Finishes available	Surcharge
Chrome-plated (cod. 50)	-


Learn about the new European EcoDesign regulation



ELECTRIC HEATERS AVAILABLE

ELECTRIC HEATER WITH DIRECT CONTROL (TYPE S)	ELECTRIC HEATING ELEMENT WITH ON/OFF SWITCH (TYPE I)	ELECTRIC HEATING ELEMENT WITH REGULATOR TO CONTROL THE INTERNAL TEMPERATURE OF THE FLUID (TYPE K)	ELECTRIC HEATING ELEMENT WITH INTEGRATED BLUETOOTH MODULE (TYPE Y)	ELECTRIC HEATING ELEMENT WITH IR ELECTRONIC CONTROL (TYPE H)	ELECTRIC HEATING ELEMENT WITH WI-FI ELECTRONIC CONTROL (TYPE E)
					
Electric heating controlled without a plug. Insulation class: II. Protection index: IP64. The electronics are supplied in polished chrome with a grey cable.	Electric heating element with built-in ON/OFF switch. Insulation class: I. Protection index: IP54. The electronics are supplied in polished chrome with a grey cable.	Electric heating element with 4-pole connector with electronic thermostat for regulating the temperature of the internal fluid. Insulation class: I. Protection index: IP44. The electronics are supplied in polished chrome with a grey cable.	Electronic control with integrated Bluetooth module. Remote programming (IRSAP APP NOW).   Temperature management and programming in close proximity to electronic control. Class II. IP 24 degree of protection. The electronics are supplied in polished chrome with a grey cable.	Plug-in electric heater via fastom with electronic control to regulate room temperature, programmable weekly. Insulation class II. IP44 degree of protection. The electronics are supplied in polished chrome with a grey cable.	WiFi electronic control for regulating the ambient temperature, programmable weekly. Insulation class: II. Protection index: IP24. The electronics are supplied in black with a transparent cable. Control your radiator remotely using the IRSAP NOW app available on   Compatible with the systems:   


ARES CHROME-PLATED ELECTRIC WITH SWITCH (I)



Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
818 - 15 rails - 2 espaces	EIS058 I 50 IR 01 NNN	30	818	580	10,1	300
1118 - 22 rails - 2 espaces	EIM050 I 50 IR 01 NNN	30	1118	500	12,8	300
	EIM058 I 50 IR 01 NNN	30	1118	580	14,2	400
1462 - 28 rails - 3 espaces	EIL050 I 50 IR 01 NNN	30	1462	500	16,3	400
	EIG050 I 50 IR 01 NNN	30	1720	500	19,4	400
1720 - 34 rails - 3 espaces	EIG058 I 50 IR 01 NNN	30	1720	580	21,7	700


available while stocks last

ARES CHROME-PLATED ELECTRIC WITH REGULATOR TO CONTROL THE INTERNAL TEMPERATURE OF THE FLUID (K)




Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
818 - 15 rails - 2 espaces	EIS058 K 50 IR 01 NNN	30	818	580	9,9	300
1118 - 22 rails - 2 espaces	EIM050 K 50 IR 01 NNN	30	1118	500	12,6	300
	EIM058 K 50 IR 01 NNN	30	1118	580	14,0	400
1462 - 28 rails - 3 espaces	EIL050 K 50 IR 01 NNN	30	1462	500	16,3	400
	EIG050 K 50 IR 01 NNN	30	1720	500	19,4	400
1720 - 34 rails - 3 espaces	EIG058 K 50 IR 01 NNN	30	1720	580	21,7	700

available while stocks last

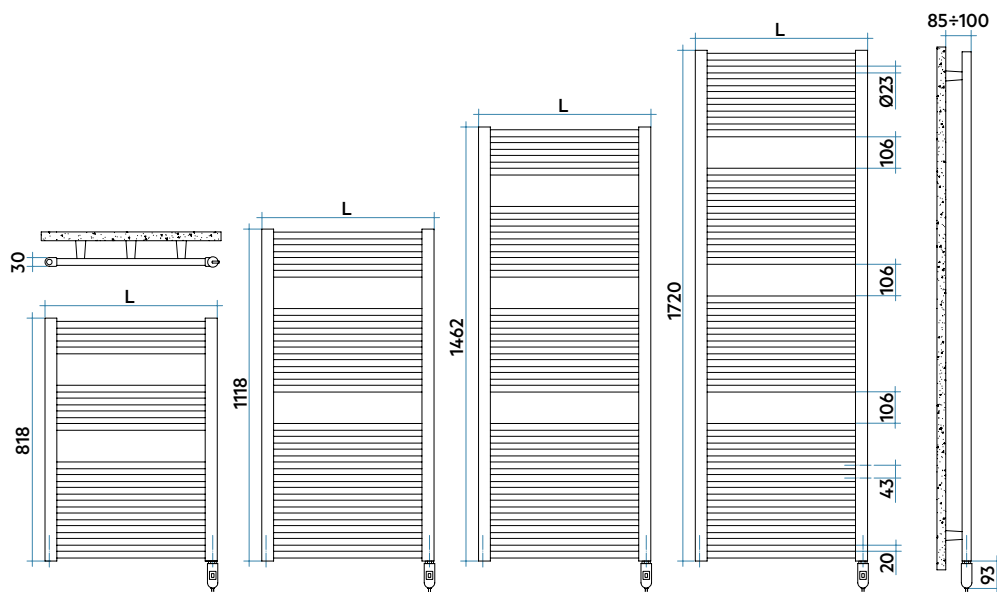


ARES CHROME-PLATED ELECTRIC WITH SWITCH (S)




Model	Code	Depth	Height	Width	Weight	Electric Power
		P mm	H mm	L mm	Kg	Watt
N 818 - 15 rails - 2 espaces	EIS058 S 50 IR 01 NNN	30	818	580	10,3	300
N 1118 - 22 rails - 2 espaces	EIM050 S 50 IR 01 NNN	30	1118	500	13,2	300
	EIM058 S 50 IR 01 NNN	30	1118	580	14,4	400
N 1462 - 28 rails - 3 espaces	EILO50 S 50 IR 01 NNN	30	1462	500	16,7	400
	EIG050 S 50 IR 01 NNN	30	1720	500	19,8	400
N 1720 - 34 rails - 3 espaces	EIG058 S 50 IR 01 NNN	30	1720	580	22,0	700

ARES CHROME-PLATED ELECTRIC WITH INTEGRATED BLUETOOTH MODULE (Y)




Model	Code	Depth	Height	Width	Weight	Electric Power
		P mm	H mm	L mm	Kg	Watt
N 818 - 15 rails - 2 espaces	EIS058 Y 50 IR 01 NNN	30	818	580	10,3	300
	EIM050 Y 50 IR 01 NNN	30	1118	500	13,2	300
	EIM058 Y 50 IR 01 NNN	30	1118	580	14,4	400
N 1462 - 28 rails - 3 espaces	EILO50 Y 50 IR 01 NNN	30	1462	500	16,7	400
	EIG050 Y 50 IR 01 NNN	30	1720	500	19,8	400
N 1720 - 34 rails - 3 espaces	EIG058 Y 50 IR 01 NNN	30	1720	580	22,0	700

ARES CHROME-PLATED ELECTRIC WITH ELECTRONIC CONTROL (H)



Model	Code	Depth	Height	Width	Weight	Electric Power
		P mm	H mm	L mm	Kg	Watt
818 - 15 rails - 2 espaces	EIS058 H 50 IR 01 NNN	30	818	580	10,3	300
1118 - 22 rails - 2 espaces	EIM050 H 50 IR 01 NNN	30	1118	500	13,2	300
	EIM058 H 50 IR 01 NNN	30	1118	580	14,4	400
1462 - 28 rails - 3 espaces	EILO50 H 50 IR 01 NNN	30	1462	500	16,7	400
1720 - 34 rails - 3 espaces	EIG050 H 50 IR 01 NNN	30	1720	500	19,8	400
	EIG058 H 50 IR 01 NNN	30	1720	580	22,0	700

ARES CHROME-PLATED ELECTRIC WITH WI-FI ELECTRONIC CONTROL (E)



Model	Code	Depth	Height	Width	Weight	Electric Power
		P mm	H mm	L mm	Kg	Watt
818 - 15 rails - 2 espaces	EIS058 E 50 IR 01 NNN	30	818	580	10,6	300
1118 - 22 rails - 2 espaces	EIM050 E 50 IR 01 NNN	30	1118	500	13,2	300
	EIM058 E 50 IR 01 NNN	30	1118	580	14,7	400
1462 - 28 rails - 3 espaces	EILO50 E 50 IR 01 NNN	30	1462	500	16,8	400
	EIG050 E 50 IR 01 NNN	30	1720	500	19,9	400
1720 - 34 rails - 3 espaces	EIG058 E 50 IR 01 NNN	30	1720	580	22,2	700

Key Codes

Width	Chrome-plated finish code					
EIS058S	50	IR	01	NNN		
Height	Electric resistance type				Packing code	