





**FLAUTO ELECTRIC**

height 1218 mm, lenght 506 mm. Melon Yellow finish (cod. E7).

#### Technical features:

- electric steel towel warmer radiator
- horizontal elements with round tubes 18 mm diameter
- side manifolds with a 30 mm round section
- complete with thermal liquid
- 1.200 mm long power cable, SCHUKO plug

#### Prices include:

- 4 chela wall brackets
- the model with WiFi electronic control, type E, includes the electronics in the same finish as the radiator

| Finishes available | Surcharge                               |
|--------------------|-----------------------------------------|
| Standard White     | -                                       |
| IRSAP finished     | <b>+25%</b>                             |
| Other RAL colors   | <b>+40% following feasibility study</b> |

Finishing codes see page 604.

① For the possibility of requesting custom models see page 590



Learn about the new European EcoDesign regulation



## ELECTRIC HEATERS AVAILABLE

### ELECTRIC HEATING ELEMENT WITH INTEGRATED BLUETOOTH MODULE (TYPE Y)



Electronic control with integrated Bluetooth module.  
Remote programming (IRSAP APP NOW).



Temperature management and programming in close proximity to electronic control. Class II. IP 24 degree of protection.  
The electronics are supplied in Standard White (cod. 01) with white cable for white radiators; chrome with grey cable for coloured radiators.



### ELECTRIC HEATING ELEMENT WITH IR ELECTRONIC CONTROL (TYPE H)



Plug-in electric heater via fastom with electronic control to regulate room temperature, programmable weekly.  
Insulation class II.  
IP44 degree of protection.  
The electronics are supplied in Standard White (cod. 01) with white cable for white radiators; chrome with grey cable for coloured radiators.



### ELECTRIC HEATING ELEMENT WITH WI-FI ELECTRONIC CONTROL (TYPE E)



Control your radiator remotely using the IRSAP NOW app available on:




Compatible with the systems:




WiFi electronic control for regulating the ambient temperature, programmable weekly. Insulation class: II. Protection index: IP24.  
The electronics are available in the same colour as the radiator with a transparent cable.

See the online guides on:  
[support.smart@irsap.com](mailto:support.smart@irsap.com)



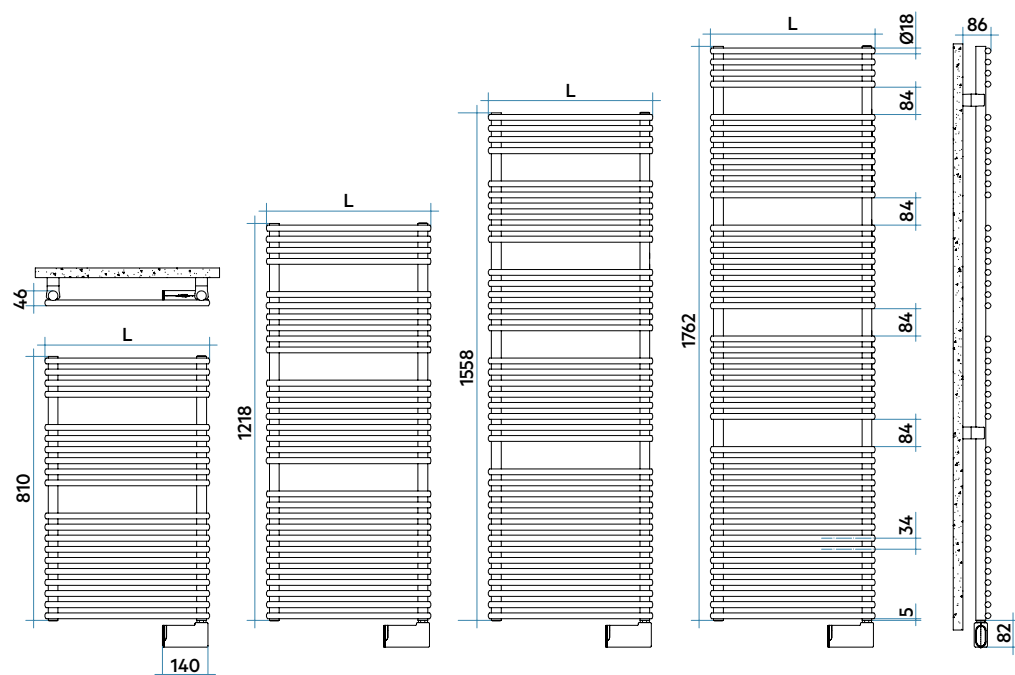


## FLAUTO ELECTRIC WITH INTEGRATED BLUETOOTH MODULE (Y)




| Model                       | Code                         | Depth<br>P mm | Height<br>H mm | Width<br>L mm | Weight<br>Kg | Electric Power<br>Watt |
|-----------------------------|------------------------------|---------------|----------------|---------------|--------------|------------------------|
| 810 - 20 rails - 2 espace   | <b>FTP050 Y 01 IR 01 NNN</b> | 46            | 810            | 506           | 9,4          | <b>400</b>             |
| 1218 - 30 rails - 3 espaces | <b>FTM050 Y 01 IR 01 NNN</b> | 46            | 1218           | 506           | 13,8         | <b>600</b>             |
| 1158 - 38 rails - 4 espaces | <b>FTL050 Y 01 IR 01 NNN</b> | 46            | 1558           | 506           | 17,5         | <b>800</b>             |
| 1762 - 44 rails - 4 espaces | <b>FTG050 Y 01 IR 01 NNN</b> | 46            | 1762           | 506           | 20,0         | <b>1000</b>            |

## FLAUTO ELECTRIC WITH ELECTRONIC CONTROL (H)



| Model                       | Code                         | Depth<br>P mm | Height<br>H mm | Width<br>L mm | Weight<br>Kg | Electric Power<br>Watt |
|-----------------------------|------------------------------|---------------|----------------|---------------|--------------|------------------------|
| 810 - 20 rails - 2 espace   | <b>FTP050 H 01 IR 01 NNN</b> | 46            | 810            | 506           | 9,4          | <b>400</b>             |
| 1218 - 30 rails - 3 espaces | <b>FTM050 H 01 IR 01 NNN</b> | 46            | 1218           | 506           | 13,8         | <b>600</b>             |
| 1158 - 38 rails - 4 espaces | <b>FTL050 H 01 IR 01 NNN</b> | 46            | 1558           | 506           | 17,5         | <b>800</b>             |
| 1762 - 44 rails - 4 espaces | <b>FTG050 H 01 IR 01 NNN</b> | 46            | 1762           | 506           | 20,0         | <b>1000</b>            |

## FLAUTO ELECTRIC WITH WI-FI ELECTRONIC CONTROL (E)



| Model                       | Code                         | Depth<br>P mm | Height<br>H mm | Width<br>L mm | Weight<br>Kg | Electric Power<br>Watt |
|-----------------------------|------------------------------|---------------|----------------|---------------|--------------|------------------------|
| 810 - 20 rails - 2 espace   | <b>FTP050 E 01 IR 01 NNN</b> | 46            | 810            | 506           | 9,8          | <b>400</b>             |
| 1218 - 30 rails - 3 espaces | <b>FTM050 E 01 IR 01 NNN</b> | 46            | 1218           | 506           | 14,2         | <b>600</b>             |
| 1158 - 38 rails - 4 espaces | <b>FTL050 E 01 IR 01 NNN</b> | 46            | 1558           | 506           | 17,9         | <b>800</b>             |
| 1762 - 44 rails - 4 espaces | <b>FTG050 E 01 IR 01 NNN</b> | 46            | 1762           | 506           | 20,4         | <b>1000</b>            |

## Key Codes

|        |                                                                             |              |
|--------|-----------------------------------------------------------------------------|--------------|
| Width  | Standard White colour code - for different colour codes see the colors page | Packing code |
| Height | Electric resistance type                                                    |              |
| FTP050 | Y                                                                           | 01 IR 01 NNN |