





JAZZ_S ELECTRIC

height 1260 mm, length 500 mm. Standard White finish (cod. 01).

Technical features:

- electric steel towel warmer radiator
- horizontal elements 25x20 mm rectangular steel tubes
- steel square collectors 30x30 mm section
- complete with thermal liquid
- power cable, length 1200 mm, SCHUKO plug

Prices include:

- 4 adjustable wall fixing brackets in the same color of the radiator

❶ **For the possibility of requesting custom models see page 590**


eco design Learn about the new European EcoDesign regulation



Finishes available	Surcharge
Standard White	-
IRSAP finished	+25%
Other RAL colors	+40% following feasibility study

Finishing codes see page 604.

Available connection



right side manifold

ELECTRIC HEATERS AVAILABLE

ELECTRIC HEATING ELEMENT WITH INTEGRATED BLUETOOTH MODULE (TYPE Y)



Electronic control with integrated Bluetooth module.
Remote programming (IRSAP APP NOW).



Temperature management and programming in close proximity to electronic control. Class II. IP 24 degree of protection.
The electronics are supplied in Standard White (cod. 01) with white cable for white radiators; chrome with grey cable for coloured radiators.



ELECTRIC HEATING ELEMENT WITH IR ELECTRONIC CONTROL (TYPE H)



Plug-in electric heater via fastom with electronic control to regulate room temperature, programmable weekly.
Insulation class II.
IP44 degree of protection.
The electronics are supplied in Standard White (cod. 01) with white cable for white radiators; chrome with grey cable for coloured radiators.



ELECTRIC HEATING ELEMENT WITH WI-FI ELECTRONIC CONTROL (TYPE E)



Control your radiator remotely using the IRSAP NOW app available on:




Compatible with the systems:



WiFi electronic control for regulating the ambient temperature, programmable weekly. Insulation class: II. Protection index: IP24.
The electronics are available in the same colour as the radiator with a transparent cable.

See the online guides on: support.smart@irsap.com




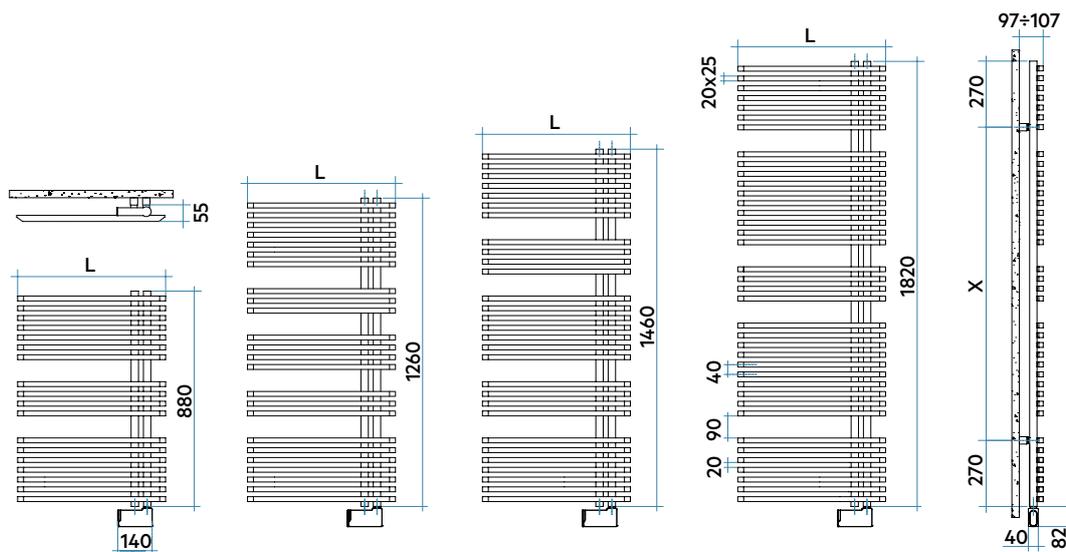

L mm	H mm	X mm
500	880	340
500	1260	720
600	1460	920
600	1820	1280




JAZZ_S ELECTRIC WITH INTEGRATED BLUETOOTH MODULE (Y)




Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
880 - 18 rails - 2 espaces	ZRS050 Y 01 IR 01 NNN	55	880	500	14,3	400
1260 - 24 rails - 4 espaces	ZRM050 Y 01 IR 01 NNN	55	1260	500	19,3	500
1460 - 29 rails - 4 espaces	ZRL060 Y 01 IR 01 NNN	55	1460	600	25,4	750
1820 - 38 rails - 4 espaces	ZRG060 Y 01 IR 01 NNN	55	1820	600	34,1	1000

JAZZ_S ELECTRIC WITH ELECTRONIC CONTROL (H)



Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
880 - 18 rails - 2 espaces	ZRS050 H 01 IR 01 NNN	55	880	500	14,3	400
1260 - 24 rails - 4 espaces	ZRM050 H 01 IR 01 NNN	55	1260	500	19,3	500
1460 - 29 rails - 4 espaces	ZRL060 H 01 IR 01 NNN	55	1460	600	25,4	750
1820 - 38 rails - 4 espaces	ZRG060 H 01 IR 01 NNN	55	1820	600	34,1	1000

JAZZ_S ELECTRIC WITH WI-FI ELECTRONIC CONTROL (E)



Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
880 - 18 rails - 2 espaces	ZRS050 E 01 IR 01 NNN	55	880	500	14,4	400
1260 - 24 rails - 4 espaces	ZRM050 E 01 IR 01 NNN	55	1260	500	19,4	500
1460 - 29 rails - 4 espaces	ZRL060 E 01 IR 01 NNN	55	1460	600	25,4	750
1820 - 38 rails - 4 espaces	ZRG060 E 01 IR 01 NNN	55	1820	600	34,2	1000

The radiator will be supplied with the resistance always mounted on the inner collector.

Key Codes

