





NOVO CHROME-PLATED ELECTRIC

height 1808 mm, lenght 750 mm. Chrome-plated finish (cod. 50).

Technical features:

- electric steel towel warmer radiator
- horizontal elements with round tubes 23 mm diameter
- side manifolds with a 40x30 mm semi-oval section
- complete with thermal liquid
- 1.200 mm long power cable, SCHUKO plug

Prices include:

- 3 chela wall brackets

Extension of Guarantee

Irsap guarantees only the hydronic seal of NOVO Chrome-plated ELECTRIC radiators for 10 years, starting from sales in 2009.

❗ For the possibility of requesting custom models see page 590

Finishes available	Surcharge
Chrome-plated (cod. 50)	-


Learn about the new European EcoDesign regulation



ELECTRIC HEATERS AVAILABLE

ELECTRIC HEATING ELEMENT WITH ON/OFF SWITCH (TYPE I)	ELECTRIC HEATING ELEMENT WITH REGULATOR TO CONTROL THE INTERNAL TEMPERATURE OF THE FLUID (TYPE K)	ELECTRIC HEATING ELEMENT WITH INTEGRATED BLUETOOTH MODULE (TYPE Y)	ELECTRIC HEATING ELEMENT WITH IR ELECTRONIC CONTROL (TYPE H)	ELECTRIC HEATING ELEMENT WITH WI-FI ELECTRONIC CONTROL (TYPE E)
Electric heating element with built-in ON/OFF switch. Insulation class: I. Protection index: IP54. The electronics are supplied in polished chrome with a grey cable.	Electric heating element with 4-pole connector with electronic thermostat for regulating the temperature of the internal fluid. Insulation class: I. Protection index: IP44. The electronics are supplied in polished chrome with a grey cable.	Electronic control with integrated Bluetooth module. Remote programming (IRSAP APP NOW). Temperature management and programming in close proximity to electronic control. Class II. IP 24 degree of protection. The electronics are supplied in polished chrome with a grey cable.	Plug-in electric heater via fastom with electronic control to regulate room temperature, programmable weekly. Insulation class II. IP44 degree of protection. The electronics are supplied in polished chrome with a grey cable.	WiFi electronic control for regulating the ambient temperature, programmable weekly. Insulation class: II. Protection index: IP24. The electronics are supplied in black with a transparent cable. Control your radiator remotely using the IRSAP NOW app available on Compatible with the systems:


NOVO CHROME-PLATED ELECTRIC WITH SWITCH (I)



Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
764 - 19 rails - 1 espace	NLP050 I 50 IR 01 NNN	30	764	500	10,2	300
1196 - 29 rails - 2 espaces	NLM050 I 50 IR 01 NNN	30	1196	500	15,4	400
1520 - 36 rails - 3 espaces	NLL060 I 50 IR 01 NNN	30	1520	600	22,2	700
1808 - 44 rails - 3 espaces	NLG075 I 50 IR 01 NNN	30	1808	750	37,6	1000


available while stocks last

NOVO CHROME-PLATED ELECTRIC WITH REGULATOR TO CONTROL THE INTERNAL TEMPERATURE OF THE FLUID (K)




Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
764 - 19 rails - 1 espace	NLP050 K 50 IR 01 NNN	30	764	500	10,5	300
1196 - 29 rails - 2 espaces	NLM050 K 50 IR 01 NNN	30	1196	500	15,9	400
1520 - 36 rails - 3 espaces	NLL060 K 50 IR 01 NNN	30	1520	600	23,1	700
1808 - 44 rails - 3 espaces	NLG075 K 50 IR 01 NNN	30	1808	750	33,7	1000

available while stocks last

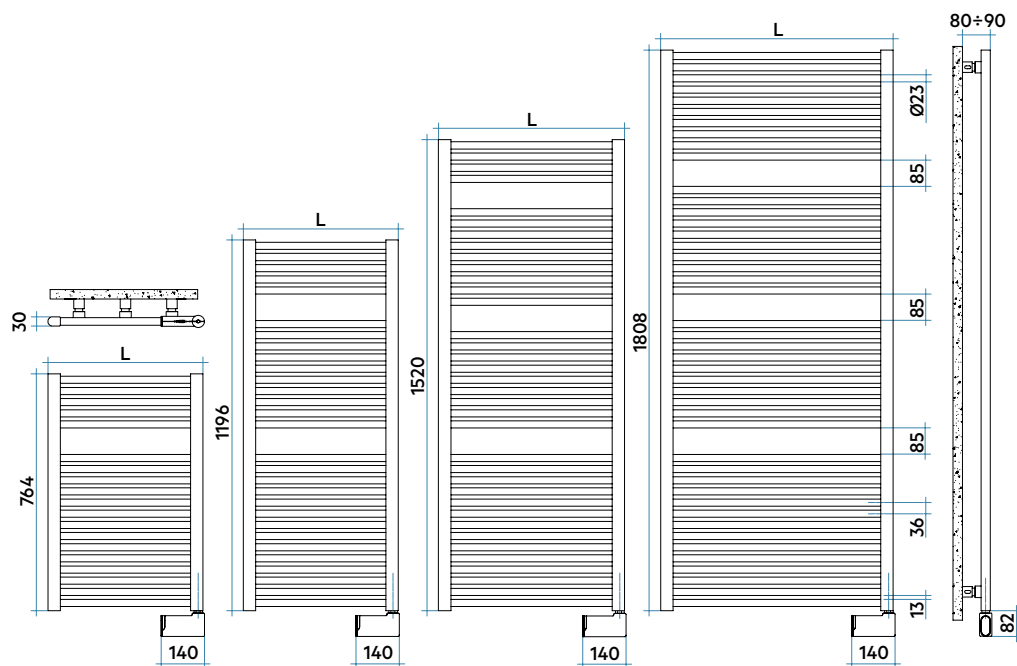


NOVO CHROME-PLATED ELECTRIC WITH INTEGRATED BLUETOOTH MODULE (Y)




Model	Code	Depth	Height	Width	Weight	Electric Power
		P mm	H mm	L mm	Kg	Watt
 764 - 19 rails - 1 espace	NLP050 Y 50 IR 01 NNN	30	764	500	10,4	300
 1196 - 29 rails - 2 espaces	NLM050 Y 50 IR 01 NNN	30	1196	500	15,7	400
 1520 - 36 rails - 3 espaces	NLL060 Y 50 IR 01 NNN	30	1520	600	22,5	700
 1808 - 44 rails - 3 espaces	NLG075 Y 50 IR 01 NNN	30	1808	750	38,0	1000

NOVO CHROME-PLATED ELECTRIC WITH ELECTRONIC CONTROL (H)



Model	Code	Depth	Height	Width	Weight	Electric Power
		P mm	H mm	L mm	Kg	Watt
764 - 19 rails - 1 espace	NLP050 H 50 IR 01 NNN	30	764	500	10,4	300
1196 - 29 rails - 2 espaces	NLM050 H 50 IR 01 NNN	30	1196	500	15,7	400
1520 - 36 rails - 3 espaces	NLL060 H 50 IR 01 NNN	30	1520	600	22,5	700
1808 - 44 rails - 3 espaces	NLG075 H 50 IR 01 NNN	30	1808	750	38,0	1000

NOVO CHROME-PLATED ELECTRIC WITH WI-FI ELECTRONIC CONTROL (E)



Model	Code	Depth	Height	Width	Weight	Electric Power
		P mm	H mm	L mm	Kg	Watt
764 - 19 rails - 1 espace	NLP050 E 50 IR 01 NNN	30	764	500	10,7	300
1196 - 29 rails - 2 espaces	NLM050 E 50 IR 01 NNN	30	1196	500	16,0	400
1520 - 36 rails - 3 espaces	NLL060 E 50 IR 01 NNN	30	1520	600	22,9	700
1808 - 44 rails - 3 espaces	NLG075 E 50 IR 01 NNN	30	1808	750	38,3	1000

Key Codes

Width

Chrome-plated finish code

Height

Electric resistance type

Packing code

NO P 050 I 50 IR 01 NNN