





NOVO ELECTRIC

height 1808 mm, lenght 500 mm. Manhattan Grey finish (cod. 4D).

Technical features:

- electric steel towel warmer radiator
- horizontal elements with round tubes 25 mm diameter
- side manifolds with a 40x30 mm semi-oval section
- complete with thermal liquid
- 1.200 mm long power cable, SCHUKO plug

Prices include:

- 3 chela wall brackets
- the model with WiFi electronic control, type E, includes the electronics in the same finish as the radiator

Extension of Guarantee

Irsap guarantees only the hydronic seal of NOVO ELECTRIC radiators for 10 years, starting from sales in 2009.

Finishes available	Surcharge
Standard White	-
IRSAP finished	+25%
Other RAL colors	+40% following feasibility study

Finishing codes see page 604.

① For the possibility of requesting custom models see page 590



Learn about the new European EcoDesign regulation



ELECTRIC HEATERS AVAILABLE

ELECTRIC HEATING ELEMENT WITH ON/OFF SWITCH (TYPE I)



Electric heating element with built-in ON/OFF switch. Insulation class: I. Protection index: IP54. The electronics are supplied in Standard White (cod. 01) with white cable for white radiators; chrome with grey cable for coloured radiators.

ELECTRIC HEATING ELEMENT WITH REGULATOR TO CONTROL THE INTERNAL TEMPERATURE OF THE FLUID (TYPE K)



Electric heating element with 4-pole connector with electronic thermostat for regulating the temperature of the internal fluid. Insulation class: I. Protection index: IP44. The electronics are supplied in Standard White (cod. 01) with white cable for white radiators; chrome with grey cable for coloured radiators.

ELECTRIC HEATING ELEMENT WITH INTEGRATED BLUETOOTH MODULE (TYPE Y)

N



Electronic control with integrated Bluetooth module. Remote programming (IRSAP APP NOW).



Temperature management and programming in close proximity to electronic control. Class II. IP 24 degree of protection. The electronics are supplied in Standard White (cod. 01) with white cable for white radiators; chrome with grey cable for coloured radiators.



ELECTRIC HEATING ELEMENT WITH IR ELECTRONIC CONTROL (TYPE H)



Plug-in electric heater via fastom with electronic control to regulate room temperature, programmable weekly. Insulation class II. IP44 degree of protection. The electronics are supplied in Standard White (cod. 01) with white cable for white radiators; chrome with grey cable for coloured radiators.



ELECTRIC HEATING ELEMENT WITH WI-FI ELECTRONIC CONTROL (TYPE E)



WiFi electronic control for regulating the ambient temperature, programmable weekly. Insulation class: II. Protection index: IP24. The electronics are available in the same colour as the radiator with a transparent cable.


Control your radiator remotely using the IRSAP NOW app available on



Compatible with the systems:




NOVO ELECTRIC WITH SWITCH (I)



Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
764 - 19 rails - 1 espace	NOP050 I 01 IR 01 NNN	30	764	500	11,1	400
1196 - 29 rails - 2 espaces	NOM050 I 01 IR 01 NNN	30	1196	500	16,9	700
1520 - 36 rails - 3 espaces	NOL050 I 01 IR 01 NNN	30	1520	500	20,9	700
1808 - 44 rails - 3 espaces	NOG050 I 01 IR 01 NNN	30	1808	500	25,3	1000


available while stocks last

NOVO ELECTRIC WITH REGULATOR TO CONTROL THE INTERNAL TEMPERATURE OF THE FLUID (K)




Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
764 - 19 rails - 1 espace	NOP050 K 01 IR 01 NNN	30	764	500	11,0	400
1196 - 29 rails - 2 espaces	NOM050 K 01 IR 01 NNN	30	1196	500	16,9	700
1520 - 36 rails - 3 espaces	NOL050 K 01 IR 01 NNN	30	1520	500	21,0	700
1808 - 44 rails - 3 espaces	NOG050 K 01 IR 01 NNN	30	1808	500	25,3	1000

available while stocks last

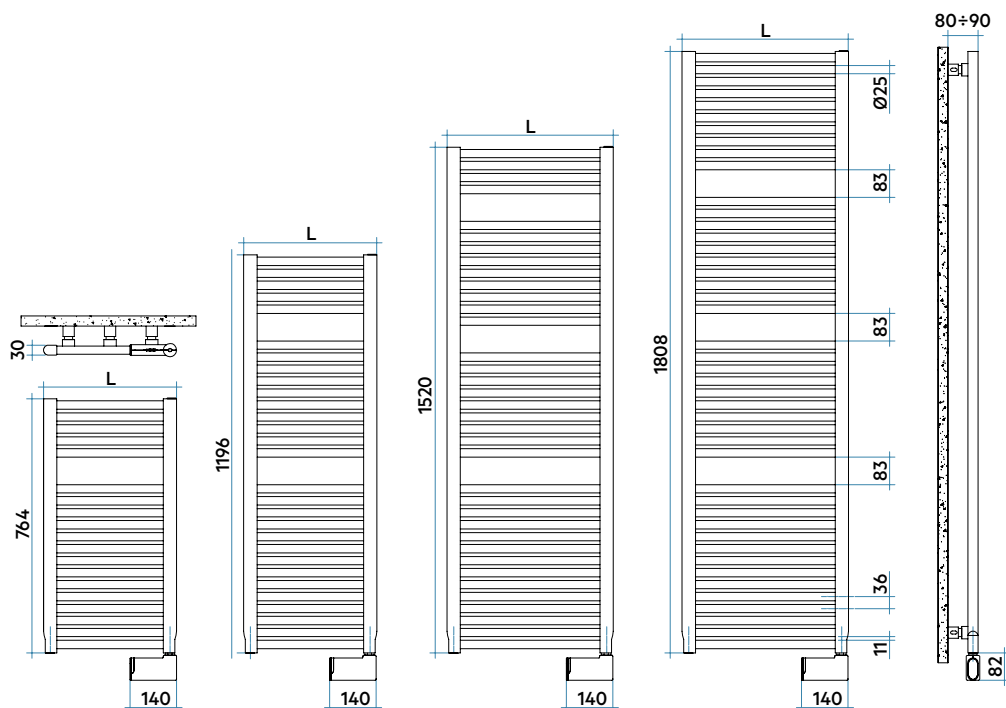


NOVO ELECTRIC WITH INTEGRATED BLUETOOTH MODULE (Y)




	Model	Code	Depth	Height	Width	Weight	Electric Power
			P mm	H mm	L mm	Kg	Watt
N	764 - 19 rails - 1 espace	NOP050 Y 01 IR 01 NNN	30	764	500	13,1	400
N	1196 - 29 rails - 2 espaces	NOM050 Y 01 IR 01 NNN	30	1196	500	19,9	700
N	1520 - 36 rails - 3 espaces	NOL050 Y 01 IR 01 NNN	30	1520	500	24,8	700
N	1808 - 44 rails - 3 espaces	NOG050 Y 01 IR 01 NNN	30	1808	500	29,5	1000

NOVO ELECTRIC WITH ELECTRONIC CONTROL (H)



Model	Code	Depth	Height	Width	Weight	Electric Power
		P mm	H mm	L mm	Kg	Watt
764 - 19 rails - 1 espace	NOP050 H 01 IR 01 NNN	30	764	500	11,4	400
1196 - 29 rails - 2 espaces	NOM050 H 01 IR 01 NNN	30	1196	500	17,2	700
1520 - 36 rails - 3 espaces	NOL050 H 01 IR 01 NNN	30	1520	500	21,3	700
1808 - 44 rails - 3 espaces	NOG050 H 01 IR 01 NNN	30	1808	500	25,7	1000

NOVO ELECTRIC WITH WI-FI ELECTRONIC CONTROL (E)



Model	Code	Depth	Height	Width	Weight	Electric Power
		P mm	H mm	L mm	Kg	Watt
764 - 19 rails - 1 espace	NOP050 E 01 IR 01 NNN	30	764	500	11,7	400
1196 - 29 rails - 2 espaces	NOM050 E 01 IR 01 NNN	30	1196	500	17,5	700
1520 - 36 rails - 3 espaces	NOL050 E 01 IR 01 NNN	30	1520	500	21,6	700
1808 - 44 rails - 3 espaces	NOG050 E 01 IR 01 NNN	30	1808	500	26,0	1000

Key Codes

Key codes

Width

Standard White colour code - for different colour codes see the colors page

NO P 050 | I 01 IR | 01 NNN

Height

Electric resistance type

Packing code