



SAX ELECTRIC

height 1800 mm, lenght 415 mm. Satin Black finish (cod. 30).

Designed by Synthesis Design



Technical features:

- manifolds with a 30 mm diameter circular section
- tubes made of steel sheet with a 20x25 mm rectangular section
- complete with thermal liquid
- electric resistance equipped with a WiFi electronic control
- long transparent power cable: 1200 mm, bottom left for Horizontal, bottom right for Vertical, SCHUKO plug
- Class II, IP24
- horizontal and vertical installation; in horizontal installation the LEDs must be pointing downwards
- VOC function i. e. air quality control

Prices include:

- fixing brackets complete with screws and anchors
- multicolored LED lighting system (optional) with adjustable intensity

Finishes available	Surcharge
Standard White	-
IRSAP finished	+25%
Other RAL colors	+40% following feasibility study

Finishing codes see page 604.



Learn about the new European EcoDesign regulation



WiFi control unit *

Control your radiator remotely using the IRSAP NOW app available from:



Compatible with the systems:



The WiFi control, on the radiator, connects to smartphones, making product management simple and immediate, configurable by downloading the IRSAP NOW APP available from all Android and IOS stores.

This APP allows the management of multiple homes, allowing individual rooms or zones to be configured independently.

The WiFi control is compatible with Google Home, Amazon Alexa and IFTTT protocol.


As well as monitoring and setting the desired temperature, the WiFi control has the following functions:


stand-by function, key lock function, antifreeze function, HOME/AWAY function (geolocation), holiday function, detect open window function, ITCS function (Intelligence Temperature Control System), which allows you to have the exact temperature at the set time, VOC function i.e. air quality control. With the Now app you can remotely vary the color tone and intensity of the RGBW LED light (optional) integrated into the radiator.

See the online guides at: support.smart@irsap.com



* Available only for UE and CH.

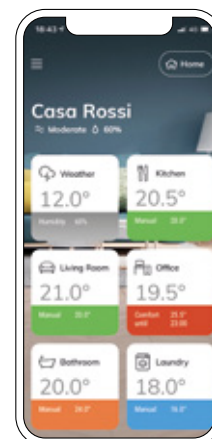

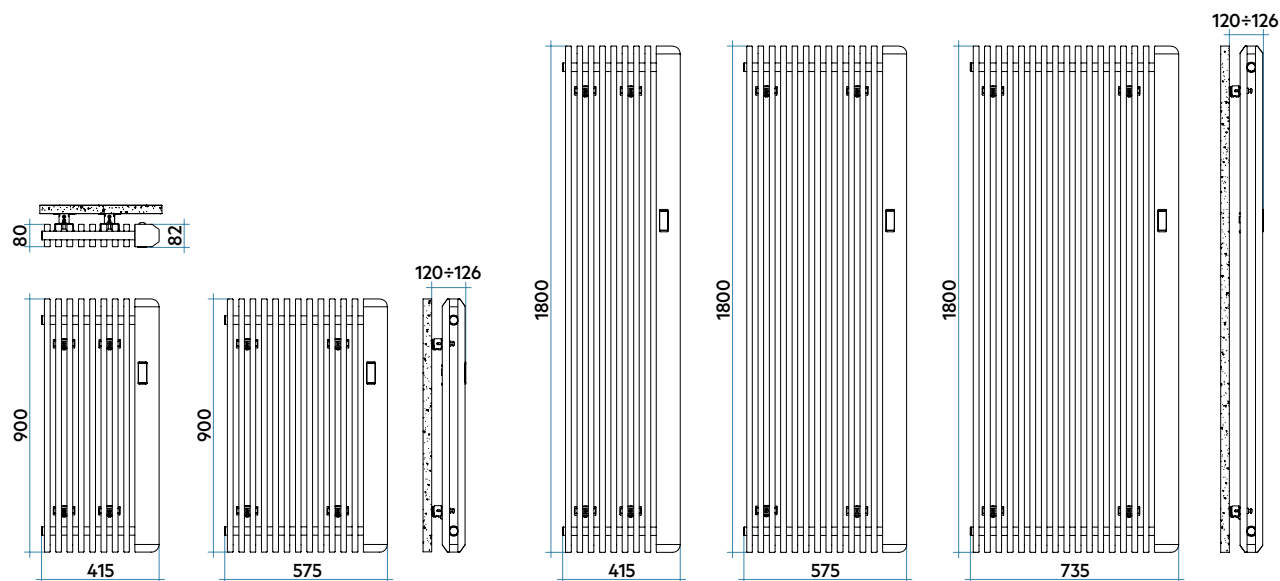

Model	Code	Depth	Height	Width	Weight	Electric Power
		P mm	H mm	L mm	Kg	Watt
SAX Electric 500 Watt	S2ES041E XX IR NNN	82	900	415	21,7	500
SAX Electric 750 Watt	S2ES057E XX IR NNN	82	900	575	30,6	750
SAX Electric 1000 Watt	S2EE041E XX IR NNN	82	1800	415	42,1	1000
SAX Electric 1500 Watt	S2EE057E XX IR NNN	82	1800	575	58,1	1500
SAX Electric 1800 Watt	S2EE073E XX IR NNN	82	1800	735	74,2	1800
SAX Electric with led 500 Watt	S2ES041E XX IR NLN - LED-AA	82	900	415	21,7	500
SAX Electric with led 750 Watt	S2ES057E XX IR NLN - LED-AA	82	900	575	30,6	750
SAX Electric with led 1000 Watt	S2EE041E XX IR NLN - LED-AA	82	1800	415	42,1	1000
SAX Electric with led 1500 Watt	S2EE057E XX IR NLN - LED-AA	82	1800	575	58,1	1500
SAX Electric with led 1800 Watt	S2EE073E XX IR NLN - LED-AA	82	1800	735	74,2	1800

Key Codes

SAX EL. without LED option

Width	Finish code
S2ES041E	XX IR NNN
Height	Packing code

SAX EL. with LED option

Width	Finish code	Configuration option for product with LED	
S2ES041E	XX IR NLN		
Height	Packing code	LED-AA	

Indication of possible installations

