





VENUS CHROME-PLATED ELECTRIC

height 1720 mm, lenght 595 mm. Chrome-plated finish (cod. 50).

Technical features:

- electric steel towel warmer radiator
- horizontal elements with round tubes 23 mm diameter
- side manifolds with a 40x30 mm semioval section
- complete with thermal liquid
- power cable, length 1200 mm, SCHUKO plug

Prices include:

- 4 chrome-plated infratube for wall fixing

❗ For the possibility of requesting custom models see page 590

Finishes available

Chrome-plated (cod. 50)

Surcharge

-



Learn about the new European EcoDesign regulation



ELECTRIC HEATERS AVAILABLE

ELECTRIC HEATING ELEMENT WITH ON/OFF SWITCH (TYPE I)



Electric heating element with built-in ON/OFF switch. Insulation class: I. Protection index: IP54. The electronics are supplied in polished chrome with a grey cable.

ELECTRIC HEATING ELEMENT WITH REGULATOR TO CONTROL THE INTERNAL TEMPERATURE OF THE FLUID (TYPE K)



Electric heating element with 4-pole connector with electronic thermostat for regulating the temperature of the internal fluid. Insulation class: I. Protection index: IP44. The electronics are supplied in polished chrome with a grey cable.

ELECTRIC HEATING ELEMENT WITH INTEGRATED BLUETOOTH MODULE (TYPE Y)

N



Electronic control with integrated Bluetooth module. Remote programming (IRSAP APP NOW).



Temperature management and programming in close proximity to electronic control. Class II. IP 24 degree of protection. The electronics are supplied in polished chrome with a grey cable.




ELECTRIC HEATING ELEMENT WITH IR ELECTRONIC CONTROL (TYPE H)



Plug-in electric heater via fastom with electronic control to regulate room temperature, programmable weekly. Insulation class II. IP44 degree of protection. The electronics are supplied in polished chrome with a grey cable.



ELECTRIC HEATING ELEMENT WITH WI-FI ELECTRONIC CONTROL (TYPE E)



WiFi electronic control for regulating the ambient temperature, programmable weekly. Insulation class: II. Protection index: IP24. The electronics are supplied in black with a transparent cable.


Control your radiator remotely using the IRSAP NOW app available on



Compatible with the systems:




VENUS CHROME-PLATED ELECTRIC WITH SWITCH (I)



Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
818 - 15 rails - 2 espaces	MISO60 I 50 IR 01 NNN	55	818	595	10,2	300
1118 - 22 rails - 2 espaces	MIMO60 I 50 IR 01 NNN	55	1118	595	14,4	400
1462 - 28 rails - 3 espaces	MIL060 I 50 IR 01 NNN	55	1462	595	18,4	400
1720 - 34 rails - 3 espaces	MIGO60 I 50 IR 01 NNN	55	1720	595	22,1	700


available while stocks last

VENUS CHROME-PLATED ELECTRIC WITH REGULATOR TO CONTROL THE INTERNAL TEMPERATURE OF THE FLUID (K)




Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
818 - 15 rails - 2 espaces	MISO60 K 50 IR 01 NNN	55	818	595	10,1	300
1118 - 22 rails - 2 espaces	MIMO60 K 50 IR 01 NNN	55	1118	595	14,3	400
1462 - 28 rails - 3 espaces	MIL060 K 50 IR 01 NNN	55	1462	595	18,2	400
1720 - 34 rails - 3 espaces	MIGO60 K 50 IR 01 NNN	55	1720	595	22,1	700

available while stocks last

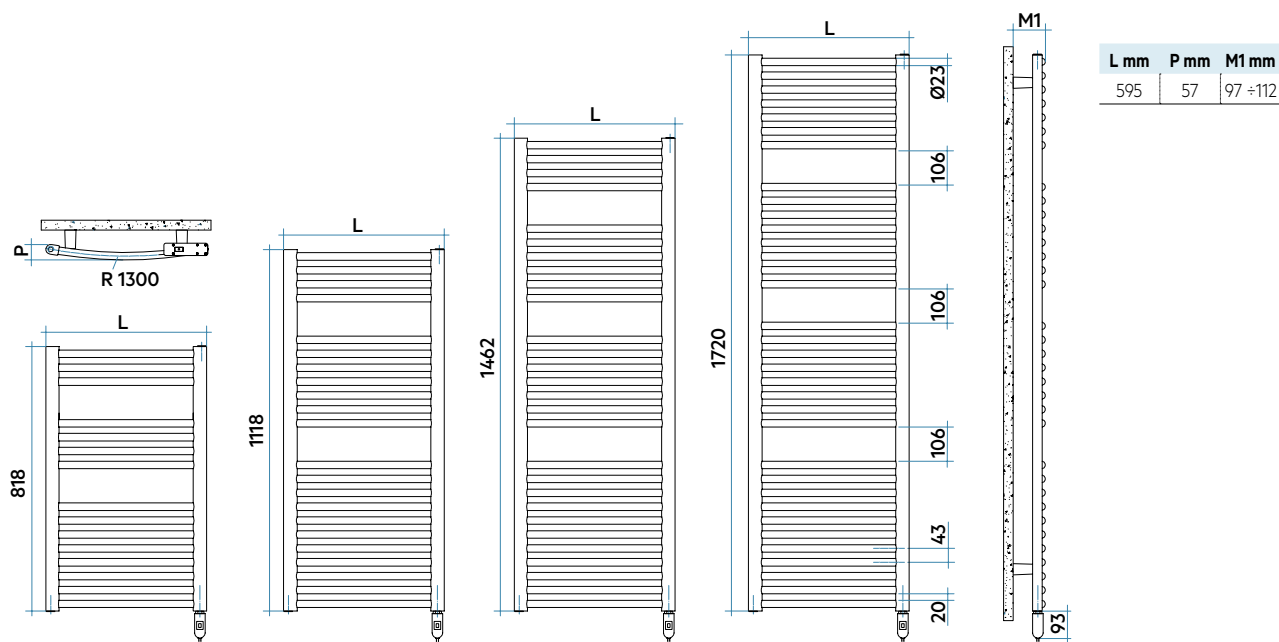


VENUS CHROME-PLATED ELECTRIC WITH INTEGRATED BLUETOOTH MODULE (Y)




Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
818 - 15 rails - 2 espaces	MIS060 Y 50 IR 01 NNN	55	818	595	10,4	300
1118 - 22 rails - 2 espaces	MIM060 Y 50 IR 01 NNN	55	1118	595	14,8	400
1462 - 28 rails - 3 espaces	MIL060 Y 50 IR 01 NNN	55	1462	595	18,8	400
1720 - 34 rails - 3 espaces	MIG060 Y 50 IR 01 NNN	55	1720	595	22,4	700

VENUS CHROME-PLATED ELECTRIC WITH ELECTRONIC CONTROL (H)



Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
818 - 15 rails - 2 espaces	MIS060 H 50 IR 01 NNN	55	818	595	10,4	300
1118 - 22 rails - 2 espaces	MIM060 H 50 IR 01 NNN	55	1118	595	14,8	400
1462 - 28 rails - 3 espaces	MIL060 H 50 IR 01 NNN	55	1462	595	18,8	400
1720 - 34 rails - 3 espaces	MIG060 H 50 IR 01 NNN	55	1720	595	22,4	700

VENUS CHROME-PLATED ELECTRIC WITH WI-FI ELECTRONIC CONTROL (E)



Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
818 - 15 rails - 2 espaces	MIS060 E 50 IR 01 NNN	55	818	595	10,7	300
1118 - 22 rails - 2 espaces	MIM060 E 50 IR 01 NNN	55	1118	595	15,0	400
1462 - 28 rails - 3 espaces	MIL060 E 50 IR 01 NNN	55	1462	595	19,0	400
1720 - 34 rails - 3 espaces	MIG060 E 50 IR 01 NNN	55	1720	595	22,7	700

Key Codes

Width	Chrome-plated finish code	Packing code
MIS060	I 50	IR 01 NNN
Height	Electric resistance type	