






XILO ELECTRIC

height 1744 mm, lenght 606 mm. Matt Powder Rose finish (cod. 5V).

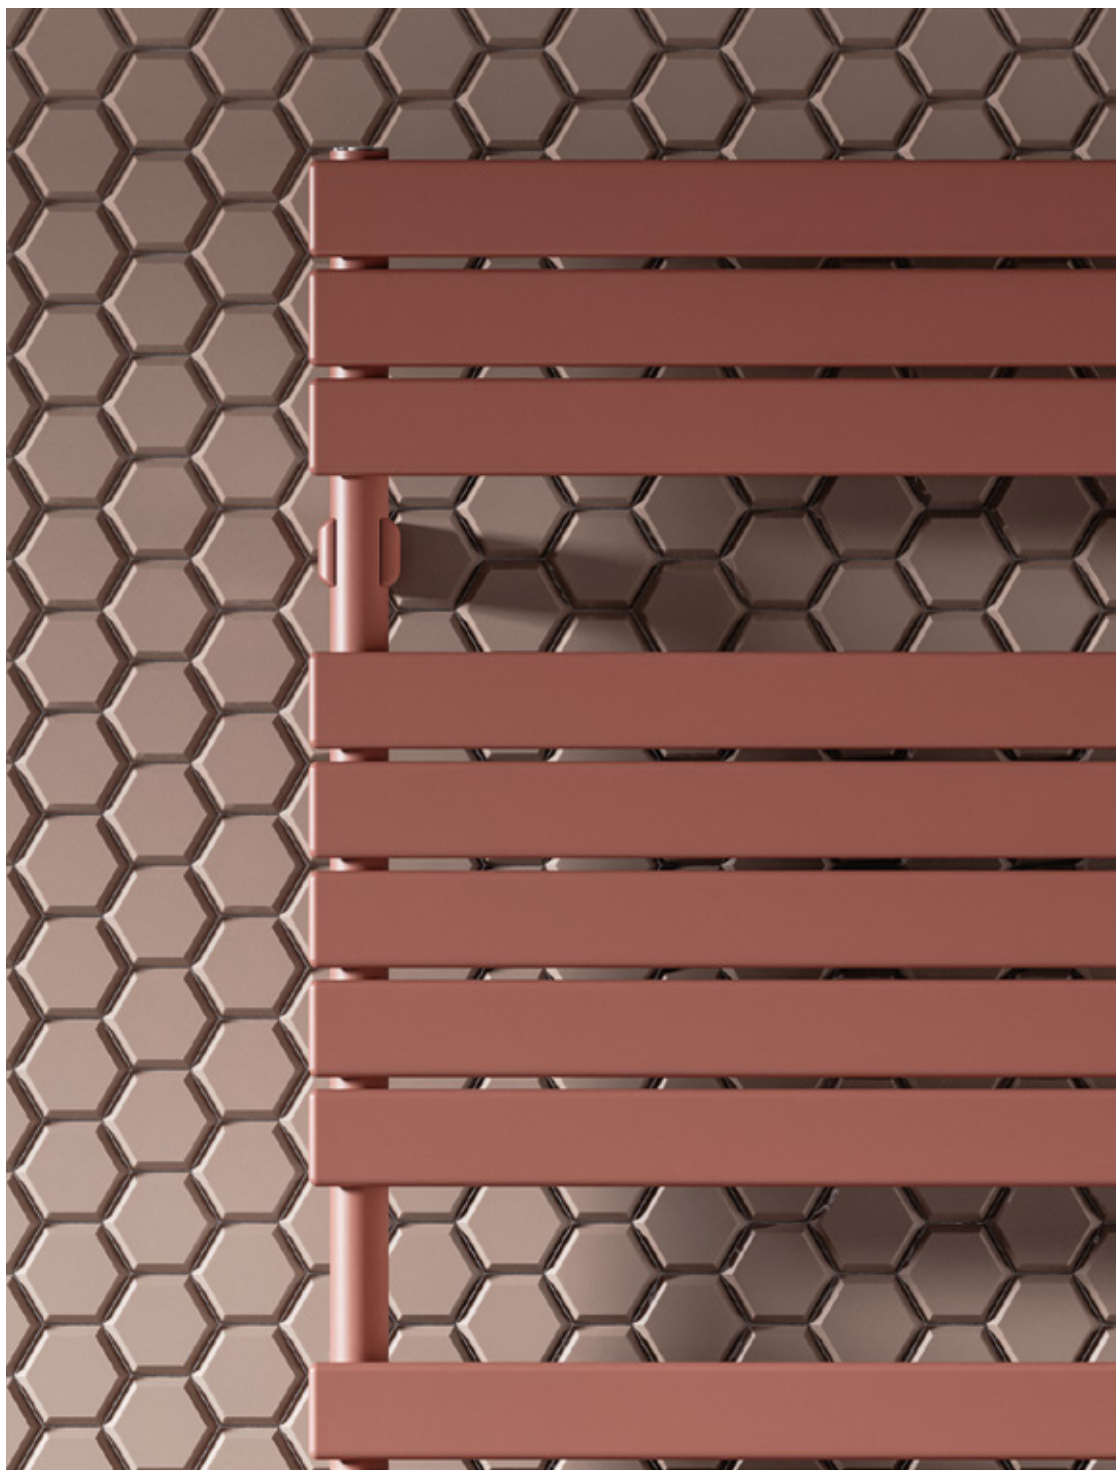

Technical features:

- electric steel towel warmer radiator
- horizontal elements featuring rectangular tubes 50x10 mm section
- side round manifolds with a 30 mm diameter
- complete with thermal liquid
- 1.200 mm long power cable, SCHUKO plug
- electronic control with integrated WiFi card
- WiFi electronic control in the same color as the radiator
- class II, IP24

Finishes available	Surcharge
Standard White	-
IRSAP finished	+25%
Other RAL colors	+40% following feasibility study

Finishing codes see page 604.

Prices include:

- 4 adjustable wall fixing brackets in the same color as the radiator
- the model with WiFi electronic control, type E, includes the electronics in the same finish as the radiator

① For the possibility of requesting custom models see page 590



Learn about the new European EcoDesign regulation



WiFi control unit *

Control your radiator remotely using the IRSAP NOW app available from:



Compatible with the systems:



The WiFi control, on the radiator, connects to smartphones, making product management simple and immediate, configurable by downloading the IRSAP NOW APP available from all Android and IOS stores.

This APP allows the management of multiple homes, allowing individual rooms or zones to be configured independently.

The WiFi control is compatible with Google Home, Amazon Alexa and IFTTT protocol.


As well as monitoring and setting the desired temperature, the WiFi control has the following functions:


stand-by function, key lock function, antifreeze function, HOME/AWAY function (geolocation), holiday function, detect open window function, ITCS function (Intelligence Temperature Control System), which allows you to have the exact temperature at the set time, VOC function i.e. air quality control. With the Now app you can remotely vary the color tone and intensity of the RGBW LED light (optional) integrated into the radiator.

See the online guides at: support.smart@irsap.com



* Available only for UE and CH.

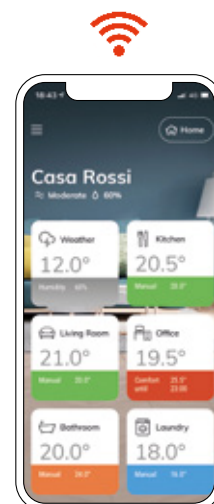


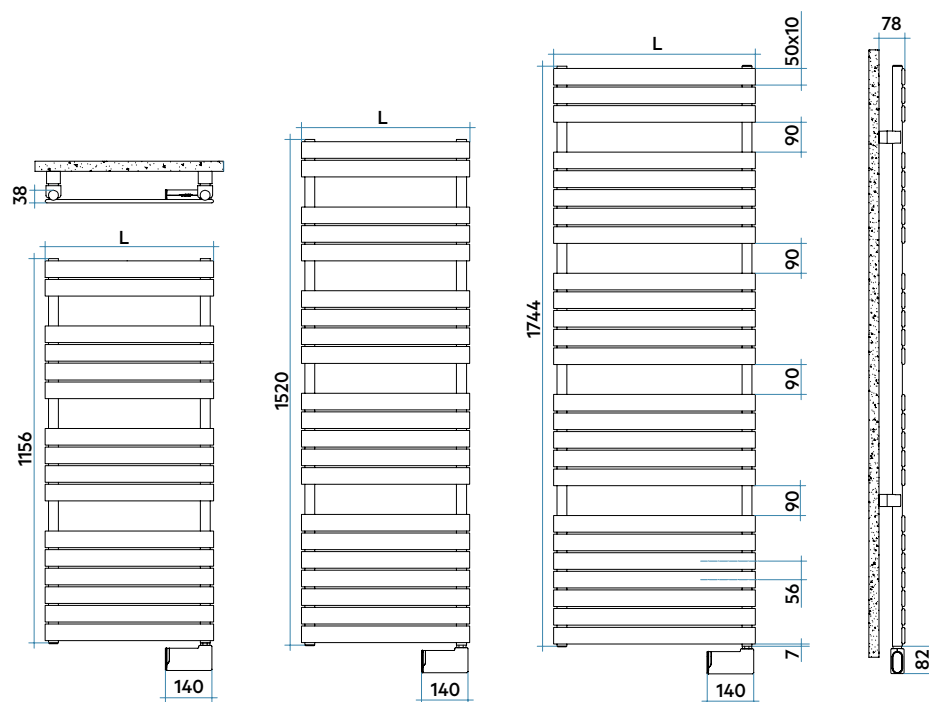

H mm	L mm	X mm	W mm
870	500	640	470
1270	500	1040	470
1830	500	1600	470




XILO ELECTRIC WITH INTEGRATED BLUETOOTH MODULE (Y)



Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
N 1156 - 16 rails - 3 espaces	XOM050 Y 01 IR 01 NNN	38	1156	506	14,8	500
N 1520 - 21 rails - 4 espaces	XOL050 Y 01 IR 01 NNN	38	1520	506	19,2	750
N	XOL060 Y 01 IR 01 NNN	38	1520	606	22,1	1000
N 1744 - 25 rails - 4 espaces	XOG060 Y 01 IR 01 NNN	38	1744	606	26,0	1200

XILO ELECTRIC WITH WI-FI ELECTRONIC CONTROL (E)



Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt
1156 - 16 rails - 3 espaces	XOM050 E 01 IR 01 NNN	38	1156	506	15,0	500
1520 - 21 rails - 4 espaces	XOL050 E 01 IR 01 NNN	38	1520	506	19,6	750
	XOL060 E 01 IR 01 NNN	38	1520	606	22,4	1000
1744 - 25 rails - 4 espaces	XOG060 E 01 IR 01 NNN	38	1744	606	26,4	1200

Key Codes

Width	X	M	050	Y	01	IR	01	NNN	Packing code
Height									

Standard White colour code - for different colour codes see the colors page